Product Datasheet

Alkaline

6LF22 Pro Power

6LF22PPG

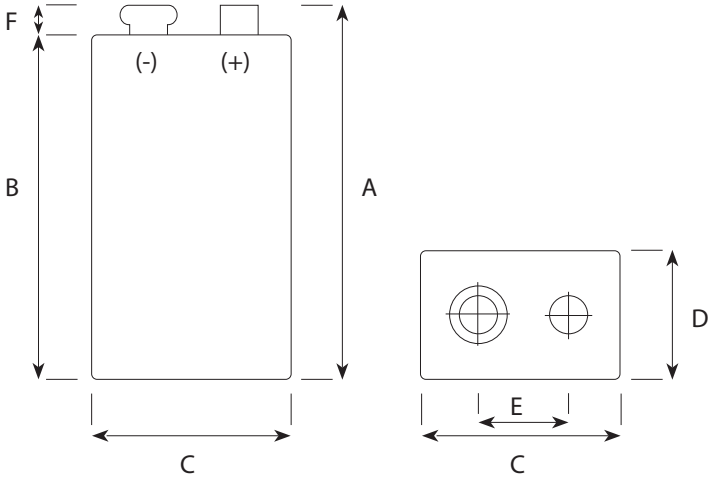

IEC Dimensions (mm)		
Dimension	**Maximum**	**Minimum**
A	48,5	46,5
B	46,2	43,2
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45
F	—	1,78

Name	9V / 6LF22 / 6AM6 / MN1604 / 1604A
Made in	Malaysia
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	47 g
Storage temp. range	+15°C (59°F) ~ + 25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ + 60°C (140°F)
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	4,8V per battery

For more information:
www.panasonic-batteries.com

Panasonic

Typical discharge values

6LF22PPG

Radio: 2h/d 620 ohm end 5,4V

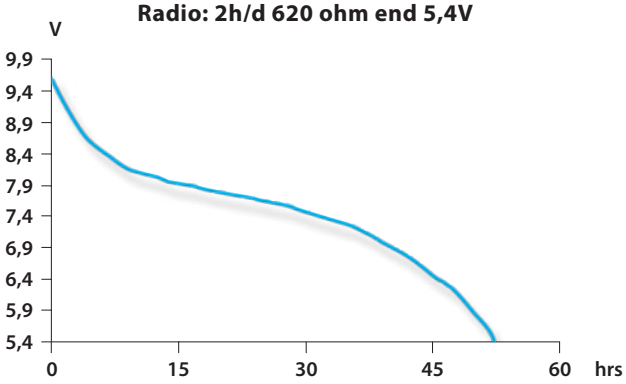

Toy: 1h/d 270 ohm end 5,4V

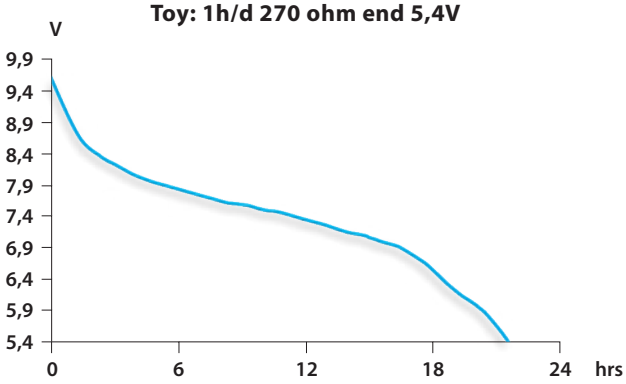

Smoke: 620 ohm + Kohm 1s/h + 24h/d end 7,5V

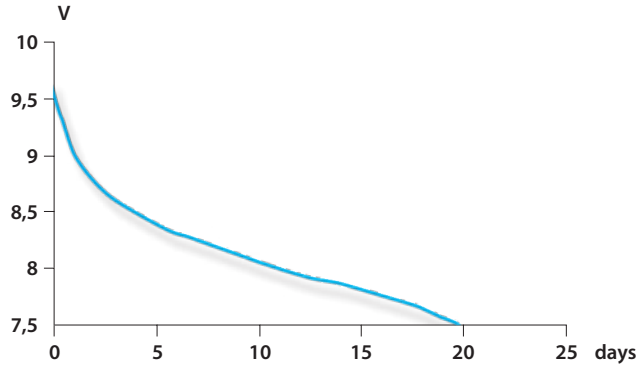

Copyright© Panasonic Energy Europe N.V. ("PECE") 2014 — All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change without prior notification. August 2014.