MAX PLUS EP91

AA

Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) No added mercury or cadmium
Designation:	ANSI-15A, IEC-LR6
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	23.0 grams (0.8 oz.)
Typical Volume:	8.1 cubic centimeters (0.5 cubic inch)
Jacket:	Plastic Label
Shelf Life:	12 years at 21°C
Terminal:	Flat Contact

Industry Standard Dimensions

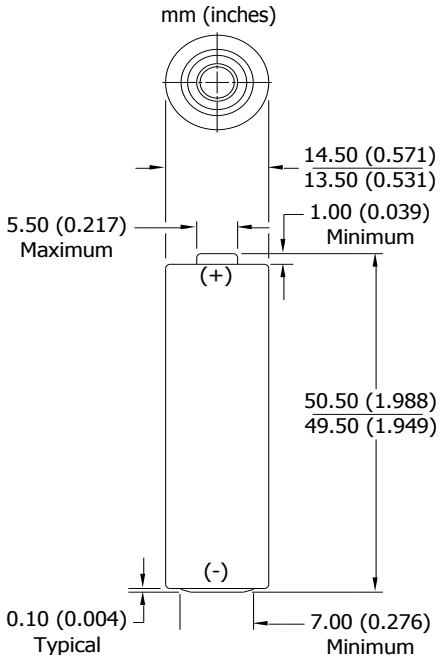

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

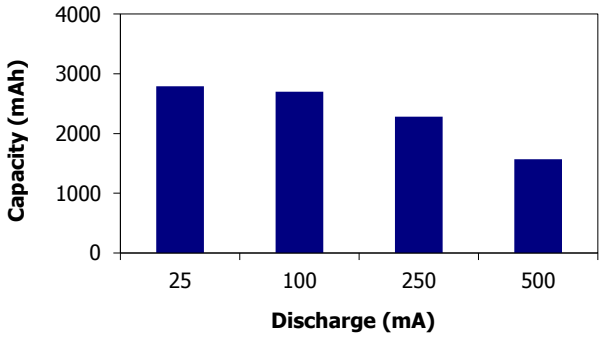

Industry Standard Tests (21°C)

RADIO/CLOCK
50 mA 1HR ON / 7HR OFF TO 1V

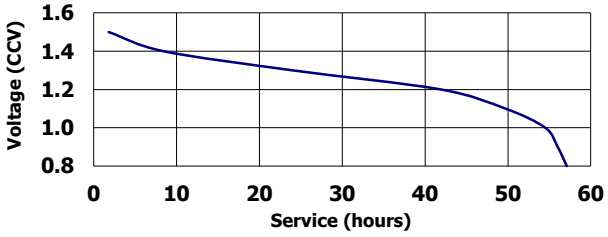

PERSONAL GROOMING **PORTABLE LIGHTING** **TOY**
750 mA 2 min/hr 8 hrs/day **3.9 ohm LIF** **3.9 ohm 1 hr/day**

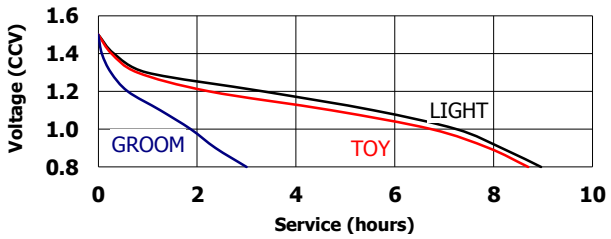

CD/GAMES
250 mA 1 hr/day

DIGITAL AUDIO
100 mA 1 hr/day

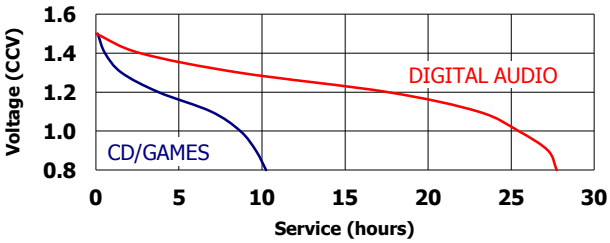

DIGITAL CAMERA
1.5K/.65K mW 2./1./27.9s 10x

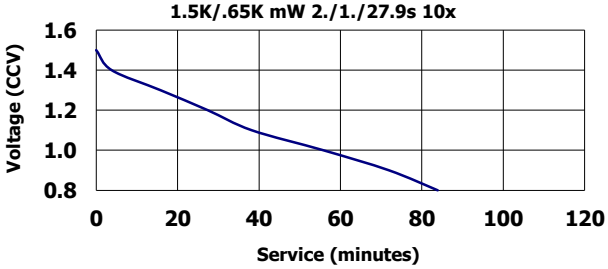

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.